

QAM Single Channel Deletion Filter

17700 Series



Application:

Deletes an entire QAM channel for the purpose of reinserting alternate programming (e.g. – Instructional, Security Camera, etc.).



R17700 Rack Mount

Provided by: Mega Hertz 800-883-8839
info@go2mhz.com www.go2mhz.com

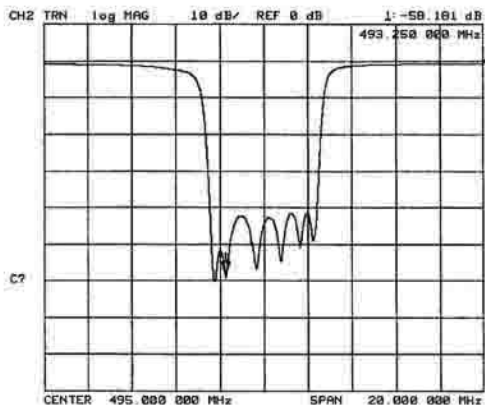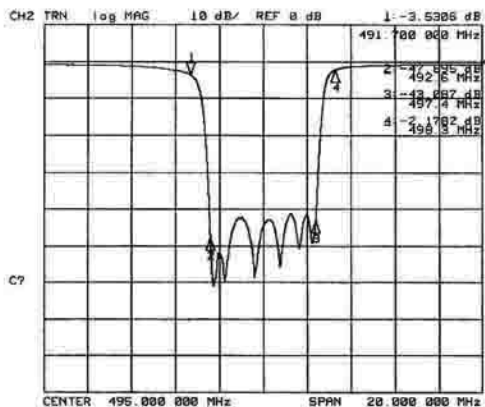

Product Features:

- Utilizes High “Q” Components for Optimum Performance
- Preserves Adjacent QAM or Analog Channels
- Operating Bandwidth: 5 MHz to 1 GHz
- Available in Plate Mount or Rack Mount Configurations
- Multi-Channel Configurations Available Upon Request

Specifications:

- Channel Availability: 2 - 135
- Channel Rejection: 40 dB (Min.)
- Adjacent QAM Channel Loss: 3 dB (Typ.); 4 dB (Max.)
- Adjacent QAM Channel Delay Variation: 400 nS (Max.)
- 75 ohms / F-female Connectors

Ordering Information: 17700-(channel #) - Plate Mount (for Wall or Table Installation)
R17700-(channel #) - Rack Mount