

maxcom MX/HD-SDI-3G-ASI

Applications

Digital Video Source:

- ASI
- HD-SDI- 3G
- HD-SDI
- SD-SDI


Automatically accepts, detects and transmits any of these sources

Transmit ASI or HD/SDI or SD/SDI Signals

Supports HD and SD, Multi-Stream ASI



Receiving Equipment Headend

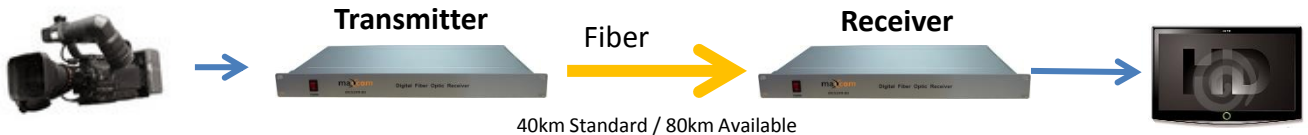

- SFB Based Optics (included)
- Standard distance 40Km, 80Km Available
- 8 CWDM Wavelengths Available
- 1470nm to 1610nm




Output:

- ASI
- HD-SDI- 3G
- HD-SDI
- SD-SDI



Upgrade your Existing PEG and Broadcast links to digital with out using additional fiber, and keep your existing equipment in place. Our ASI, HD-SDI , and Analog Video products come with CWDM Wavelengths, and our Fiber Muxes come with 1310nm express ports allowing you to keep your existing transport system in place while adding these services to the same fiber strand. Supports multiple ASI and/or SDI Streams.

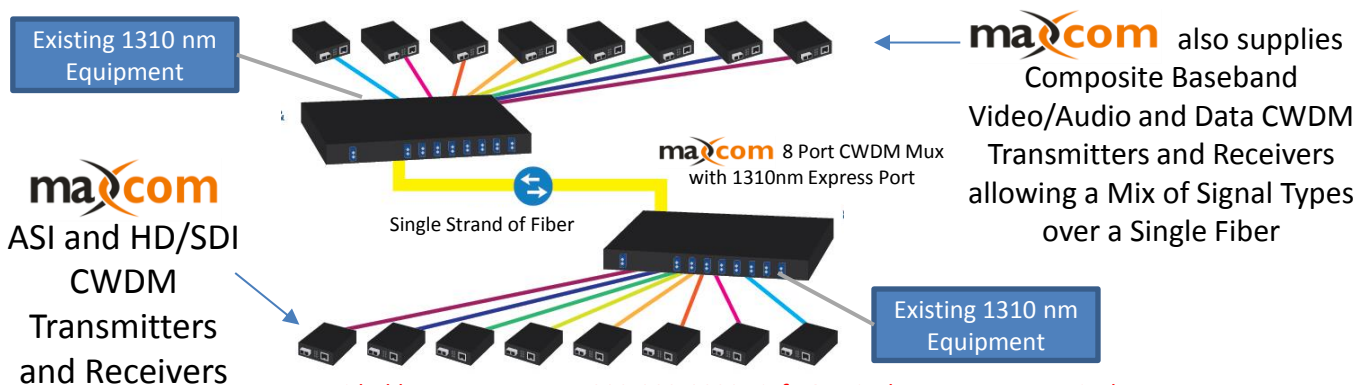

Provided by: Mega Hertz 800-883-8839 info@go2mhz.com www.go2mhz.com